Vega Datasheet

Overview

Name	Vega
Function	Vega is a temperature-stabilized, DC-controlled, dimmable light source with versatile flicker functionality. It is used to characterize sensors and camera systems.
Features	• Temperature-stabilized and dimmable light source • Very high luminance for testing sensors near saturation • Versatile flicker functionality for realistic tests • Compatible with the Lightcube-Controller

General Description

Power Supply/Consumption	12 V_{DC}, 55 W
Ports	• DC Power connection • 2 x CAN – Ports
Dimensions (depth x width x height)	120 mm x 120 mm x 130 mm
Device weight	1.2 kg
Ambient temperature	18 - 28 °C
Scope of delivery	• 1 x Vega light source • 1 x CAN-Cable • 1 x DC Power cable • 1 x Acceptance protocol • 1 x Vega light source operating instructions
Lifespan	10,000 h

Optical characteristics

Light source

Light source	36 temperature-controlled LEDs based on iQ-DC technology
Output window	Square output window 70 mm x 70 mm
Active area	60 mm x 60 mm
Uniformity (active area)	> 95% at 100% power output > 94% at 10% power output > 90% at 1% power output > 90% at 0.1% power output
Illumination stability after startup time	± 0.5%
Correlated Color Temperature (CCT)	4900 K (± 200 K)
Color Rendering Index (CRI)	> 95
Response time (switch illuminant) *	0.5 s (typical)
Minimum luminance	0.1 – 0.5 cd/m^2
Maximum luminance	55,500 – 61,500 cd/m²
Startup time (time until the operating temperature is reached)	120 s
Flickering modes:	• Square (LED-Flicker) • Sine • Triangle
Flicker modes	1 – 1000 Hz (Square) 10 – 500 Hz (Sine / Triangle)
Duty cycle	1 – 99% (Square)
Dim function	10^6 - 10 Steps
Flicker frequency step width	0.1 Hz (1 – 200 Hz) 0.2 Hz (200 – 500 Hz) 0.5 Hz (500 – 1000 Hz)
Relative inaccuracy of the referenced internal luminance sensor	±5% at L > 10 cd/m² ±10% at L > 2 cd/m² ±30% at L > 0.5 cd/m² Not specified at L <= 0.5 cd/m²

Typical spectral emission	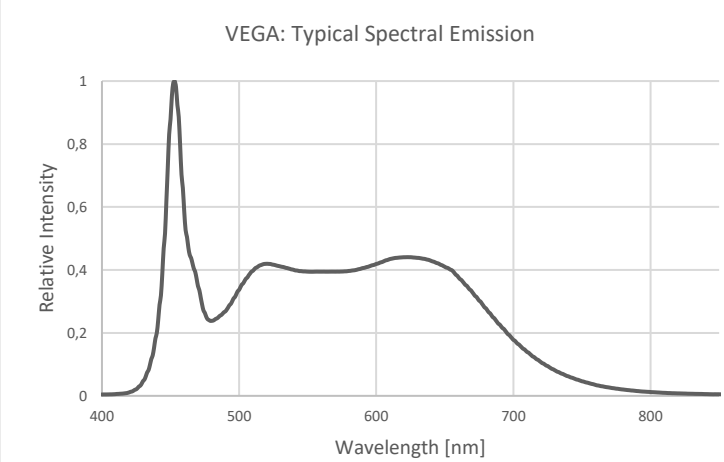

Software functions

Software	Vega Software
Requirements	Lightcube-Controller PC with Windows 10 (or higher) USB port (2.0 or higher)
Functions	• Intensity • Frequency • Duty cycle • Mode selection • Phase shift
Software and API (C/C++/Python)	Available as separate options

Miscellaneous

Terms & Conditions	image-engineering.de/terms-and-conditions